

LUXA-32 (4-IN-1)

socket | white | integrated 24 V driver | double switch

Product code: 631234



A double power socket with controllable 24 V driver and connector

LIMENTE LUXA-2 is designed for kitchen workspaces. The power socket can also be used to control the lighting in the kitchen workspace! LIMENTE LUXA-2 is quick and easy to install, and due to its design, the socket suits every type of lighting. The power socket has an oblique design, which makes it easy to use. You are always able to clearly see the angle in which plugs are to be connected in the sockets. This way the sockets are always on hand and available! LUXA power sockets always have double sockets and an ON/OFF switch for a separate connector. Use the switch to control the lighting in your kitchen workspace, for example! Combine LIMENTE LUXA with any LIMENTE lighting sets and create a stylish lighting design, which you are able to control from the switch integrated in LUXA power socket. All power sockets are made of metal either in stainless steel or white and are child proof. LIMENTE LUXA is a simple way to change your traditional, fluorescent lighting into a modern led-lighting without heavy electrical work. Install LIMENTE LUXA in the same place where the fluorescent light fixture used to be. LIMENTE LUXA has two sockets, which replace the sockets in the fluorescent light fixture. Connect any LIMENTE lighting set to the separate connector, and use the switch to control your new and improved kitchen lighting!

Color choices

LIMENTE LUXA-2 is available in three different colors: stainless steel, white (RAL9003), and black (RAL9004).

Installation

Determine the place, where the power supply will be imported, or use an existing power supply cable. The socket must be installed in a corner ensuring the back sides of the socket do not remain open to exposure. The mounting takes place with the supplied screws. Please see further instructions in the installation guide. LIMENTE LUXA-2 socket requires its own power supply (max. 16 A). Connect the power supply cable into the connectors of the outlet. Finally, attach the outlet to a solid surface using the screws supplied. Please see further instructions in the installation guide.



THE FOLLOWING ITEMS ARE INCLUDED

- double socket
- integrated 30W driver controlled by an integrated switch
- 2 x driver for LED luminaires female with TOP connectors
- ON/OFF 240 V supply
- quick connector for connection
- plastic free packaging

LUXA-32 SOCKET INCL. SWITCH WH



OVERVIEW

| | |
|-------------------|--|
| PRODUCT CODE | 631234 |
| GTIN-CODE | 6438400002968 |
| ELECTRICAL NUMBER | 2407137 |
| ETIM GENERAL NAME | Socket outlet+switch |
| ETIM CLASS | Socket outlet EC000125 |
| ETIM GROUP | 24 Surface mounting socket-outlets and plugs |
| COLOUR | White |
| LAMP TYPE | - |

SPECIFICATIONS

| | |
|-----------------------------------|---|
| PRODUCT DIMENSIONS | 213.0 x 165.0 x 60.0 |
| POSITION | To an interspace, Inside the cabin |
| MOUNTING METHOD | Surface mounting |
| COLOUR TEMPERATURE | - |
| COLOUR RENDERING INDEX CRI | - |
| RATED LIFE TIME | - |
| ENERGY EFFICIENCY CLASS | - |
| LUMINOUS FLUX | - |
| EFFICIENCY | - |
| VOLTAGE | 240 V, 24 V DC |
| INGRESS PROTECTION CODE | IP20 |
| NUMBER OF LEDS/M | - |
| INPUT POWER | - |
| NUMBER OF SWITCHING CYCLES | - |
| AMBIENT TEMPERATURE RANGE | -20°C~45°C |
| INPUT POWER CONNECTOR | Fixed installation |
| WARRANTY PERIOD (MONTHS) | 24 |
| ADDITIONAL COVER (MONTHS) | - |
| INSTALLATION AND OPERATING MANUAL | https://www.limente.fi/Images/productpics/instructions/limente_luxa.pdf |

LUXA-32 SOCKET INCL. SWITCH WH

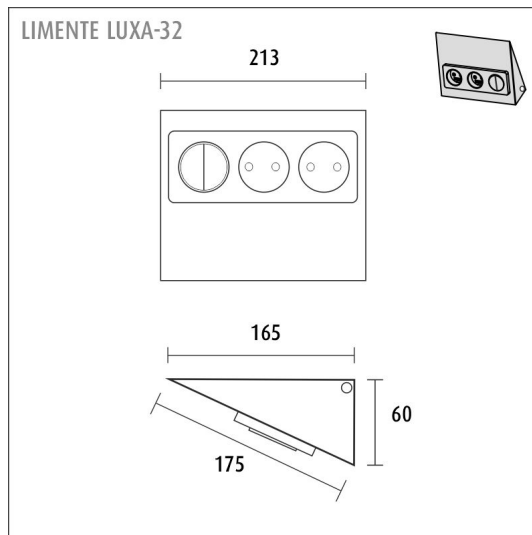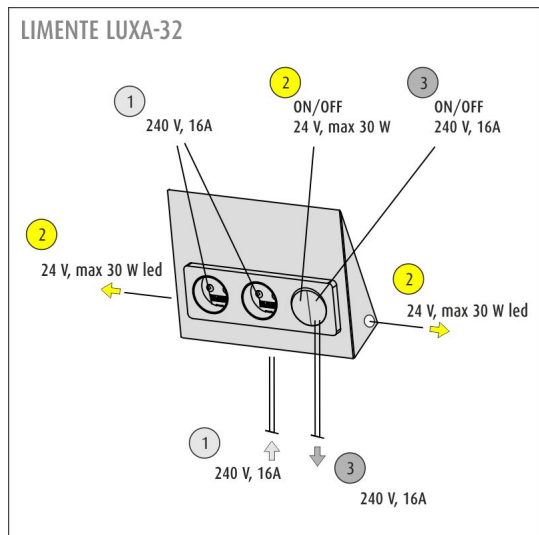

LUXA-32 SOCKET INCL. SWITCH WH

