


LED-DECKER 20

2m | 4000 K | aluminum | 180 led/m | 1080 lm/m | Ra>85
Product code: 68980

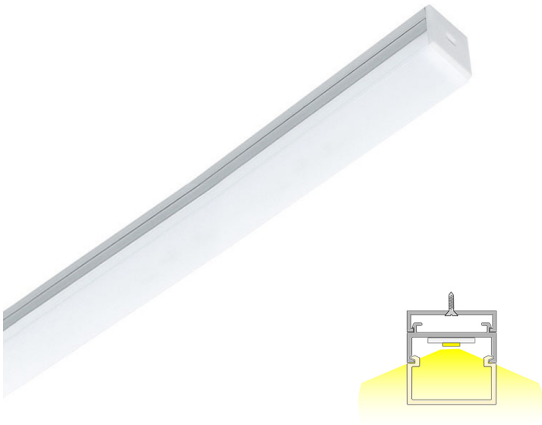

Accent lighting to highlight shapes and furniture in your home

LIMENTE LED-DECKER B illuminates both forward and to the sides. The fixture comes with a separate attachment board, which fits the power supply cord of the led strip. Use LIMENTE LED-DECKER B to highlight the shapes of your furniture by installing the fixture between your furniture to create a stylish light beam or use the fixture as general functional lighting e.g. inside a mirrored bathroom cabinet to have a pleasant, three-way lighting. The light is stylish and continuous with no connection points interrupting the light, which provides even light throughout the area.

See "Installation pictures" for tips on how to use LED-DECKER B to illuminate furniture in the kitchen or in the bathroom. LIMENTE LED-DECKER profiles are available in multiple lengths (2-6m) and three different color temperatures (3000K, 4000K and 2700K-6000K) in both IP20 and IP44 versions. The profile itself has a standard length of 2m and can be shortened to a desired length.

[Learn more from our website](#)

Dimming and lighting control

Appropriate lighting for any occasion is made easy with our dimming and lighting control system. You can easily change the lighting and ambience in your home from efficient and bright to dim and cozy by dimming your LIMENTE LED-DECKER with our wireless system. You can use the same switch to adjust all the LIMENTE lights in the room, including various ceiling, panel and profile lights. The light adjusts smoothly at the same time while creating ambience for working, entertaining or any mood in between.

[Learn more from our website](#)

Easy installation

LIMENTE LED-DECKER B is fast and easy to install. Simply fasten the attachment board to the desired place with screws and attach the fixture by pressing it onto the attachment board.

[Learn more from our website](#)

THE FOLLOWING ITEMS ARE INCLUDED

- aluminum profile 2 m
- end pieces
- fasteners
- led-ribbon 2 m, with driver in both ends
- 3m power cords 2 pcs

DECKER 20 COM 4K AL PROF.LIGHT

OVERVIEW

| | |
|-------------------|------------------------------------|
| PRODUCT CODE | 68980 |
| GTIN-CODE | 6438400002524 |
| ELECTRICAL NUMBER | 4129780 |
| ETIM GENERAL NAME | Light ribbon-/hose/-strip |
| ETIM CLASS | Light ribbon-/hose/-strip EC002706 |
| ETIM GROUP | 41 Domestic light fittings |
| COLOUR | Alulook |
| LAMP TYPE | LED |

SPECIFICATIONS

| | |
|-----------------------------------|---|
| PRODUCT DIMENSIONS | 2000.0 x 19.1 x 20.0 |
| POSITION | On the top cabin, Inside the cabin, To damp spaces |
| MOUNTING METHOD | Surface mounting |
| COLOUR TEMPERATURE | 4000 K |
| COLOUR RENDERING INDEX CRI | > 85 |
| RATED LIFE TIME | 35.000h (L80B10) |
| ENERGY EFFICIENCY CLASS | F |
| LUMINOUS FLUX | 1080 lm/m |
| EFFICIENCY | |
| VOLTAGE | 24 V DC |
| INGRESS PROTECTION CODE | IP44 |
| NUMBER OF LEDS/M | 180 |
| INPUT POWER | 29 W |
| NUMBER OF SWITCHING CYCLES | > 50 000 |
| AMBIENT TEMPERATURE RANGE | -20°C~50°C |
| INPUT POWER CONNECTOR | Top, hole Ø 8 mm |
| WARRANTY PERIOD (MONTHS) | 24 |
| ADDITIONAL COVER (MONTHS) | 12 |
| INSTALLATION AND OPERATING MANUAL | https://www.limente.fi/Images/productpics/instructions/limente_led-decker.pdf |

DECKER 20 COM 4K AL PROF.LIGHT

RECOMMENDED ACCESSORIES

| PRODUCT CODE | PRODUCT |
|--------------|--|
| LED28030 | LED POWER SUPPLY, WHITE, 24 V, 30W, INTEGRATED CONNECTORS |
| LED28060 | LED POWER SUPPLY, WHITE, 24 V, 60W, INTEGRATED CONNECTORS |
| LED28100 | LED POWER SUPPLY, WHITE, 24 V, 100W, INTEGRATED CONNECTORS |
| 640420 | SMART 420, WIRELESS LIGHT CONTROL |
| 640421 | SMART 421, WIRELESS LIGHT CONTROL |
| 640422 | SMART 422, WIRELESS LIGHT CONTROL |
| 640424 | SMART 422, WIRELESS LIGHT CONTROL |
| 640425 | SMART 425, WIRELESS LIGHT CONTROL |

DECKER 20 COM 4K AL PROF.LIGHT

